

≡ conversion GHSV 40000/h ▲ selectivity GHSV 4000/h
 ⊖ abrasion [wt.%] (according to ASTM D 4058-87)

Fig. 2:

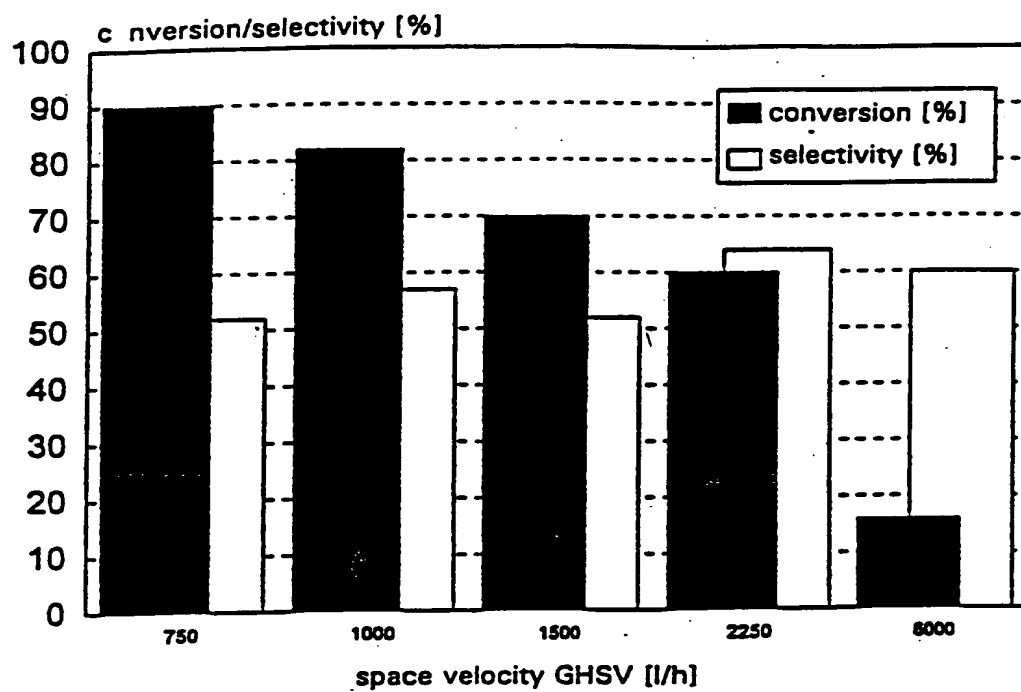


Fig. 3:

